

8G24UT-DEKA


SPECIFICATIONS

| | |
|-----------------------------|------------------------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 84.5Ah |
| Capacity at C/20 | 73.6Ah |
| Weight | 51.5 lbs. (23 kg) |
| Plate Alloy | Lead Calcium |
| Posts | Forged Terminals & Bushings |
| Container/Cover | Polypropylene |
| Operating Temperature Range | -76°F (-60°C) - 140°F (60°C) |

For Charging Parameters please refer to www.mkbattery.com

Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

| | |
|-------------|-------------------------------|
| Vent | Self-sealing |
| Electrolyte | Sulfuric acid thixotropic gel |
| Terminal | G (T881) |



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

| | |
|--------|--------------------------------------|
| Length | 10.20 (259 mm) |
| Width | 6.56 (167 mm) |
| Height | 9.27 (235 mm) Including terminals |

Gel Cycle Life vs Depth of Discharge at 25°C (77°F)
Based on BCI 2-hour Capacity

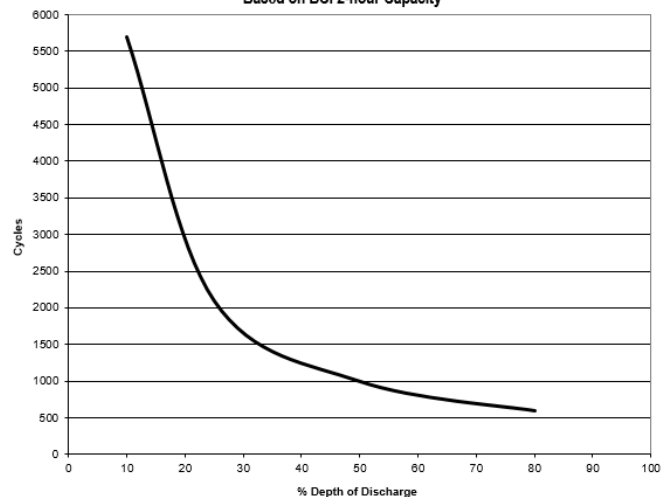

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

